



Photo : Euromix 400/6 with a 16,5m fixed loading conveyor

KVM Euromix 400 and Euromix 700

-sets the pace for sand and gravel dosing equipment according to the newest EURO norms. EN 12620, EN 13043, EN 13055-1, EN 13055-2, EN 13139, EN 13242, EN 13383-1, EN 13450, TL SoB-StB 04, TL G SoB-StB 04 TL Gestein StB 04.

Today gravel mixture is not something any gravel company can mix in without having the correct equipment. EU today has set down clear specifications to which gravel mixtures both road foundation and concrete mixtures must follow. Today the sieve line is not only to follow maximum and minimum stone size limits. The new EN standards clearly specify that the average blends must only divert very little from the medium sieve line. It means that all laboratory measures taken from the mixtures are allowed a very small variation.

The KVM Euromix Gravel dosing series meet the present and coming EN standards. So do domestic standards like the German TL SoB-StB 04 (foundation layers for roads without binders), TL Gestein StB 04 (foundation layers).

So the question is: will your company carry the risk of not following the EU rules of today?

WinKies laboratory software 2008



Dosing belt feeders




Control system



Loading conveyor



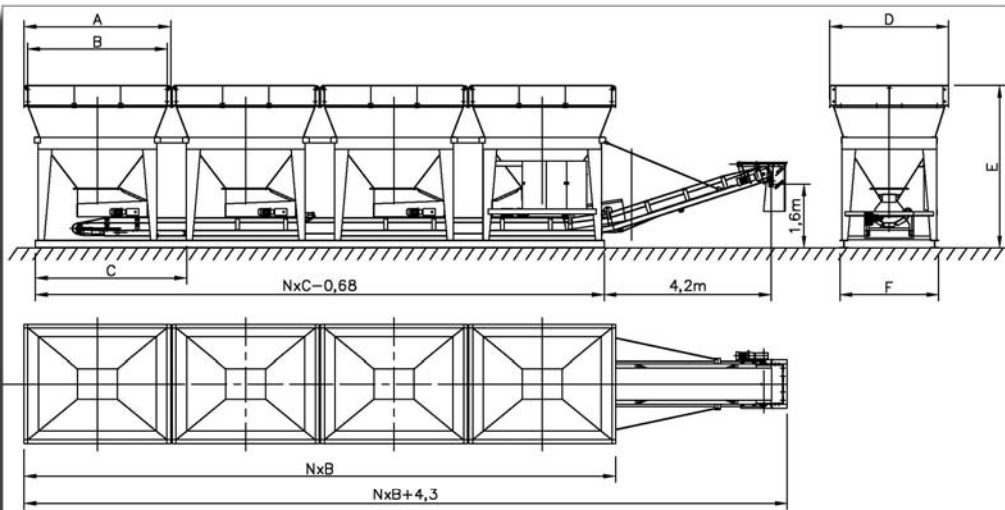

Type	A	B	C	D	E	F	Weight [Tonne]
Euromix 400	3,5m	3,4m	3,7m	3,0m	4,05m	2,5m	N x 2,5 + 0,5
Euromix 700	4,2m	4,0m	4,2m	3,0m	4,6m	2,2m	N x 5,2 + 0,5

Type	Loading width	Hopper volume	Belt feeder	Collecting conveyor	Plant capacity
Euromix 400	3,5 m	12 m ³	650	800	Max. 400 tph
Euromix 700	4,2 m	21,5 m ³	800	1000	Max. 700 tph

Type :	Euromix 400	Euromix 700
Coarse grate	△	△
Site extension 500 mm	△	△
Extra vibrators on more hoppers	△	△
Hopper - Half full – signal warning	△	△
Water addition	△	△
Front plates to build slope	△	○

Computer control system	Euromix 400	Euromix 700
Control on electrical-panel	○	○
Winkies + Card writer on lap top	△	△
Card reader on control panel		
Control panel on separate holder	△	△
Coloured print on magnetic cards	△	△

Loading conveyor	16,5m / 18° x 4,5 free	20m / 18° x 6,0 free	24m / 18° x 7,5 free
	△	△	△
Option for turnable conveyor	△	△	△
Electric transmission for turning	△	△	△
Cascade mixer unit	△	△	△
Weighing system on conveyor	△	△	△

Standard : ○ Option : △

Dealer

KVM INTERNATIONAL A/S
 INDUSTRIVEJ 24
 DK-8620 KJELLERUP
 Phone : +45 87 702 700
 Fax : +45 87 702 701
 www.KVM.com

INDIVIDUAL SOLUTIONS OPTIMISE YOUR COMPANYS POSSIBILITIES IN THE FUTURE

YOUR RELIABLE PARTNER



Euromix 400 - Euromix 700

The future way to gravel mixtures

Meets all European standards within construction work for:



- Road construction
- Concrete industries
- Railroad construction
- Airport runway construction

• GRAVEL MIXING PLANT